


# Replacing a tone pot with a ToneStyler

## Basic Instructions

**Always connect your ToneStyler to the full-volume guitar signal BEFORE all volume pots**


Ground wires & shields are NOT SHOWN. Pickup, switch and output jack wiring are NOT SHOWN.  
Please see your guitar model's detailed instruction page for all components and signal wiring.

Fender® style  
tone pot

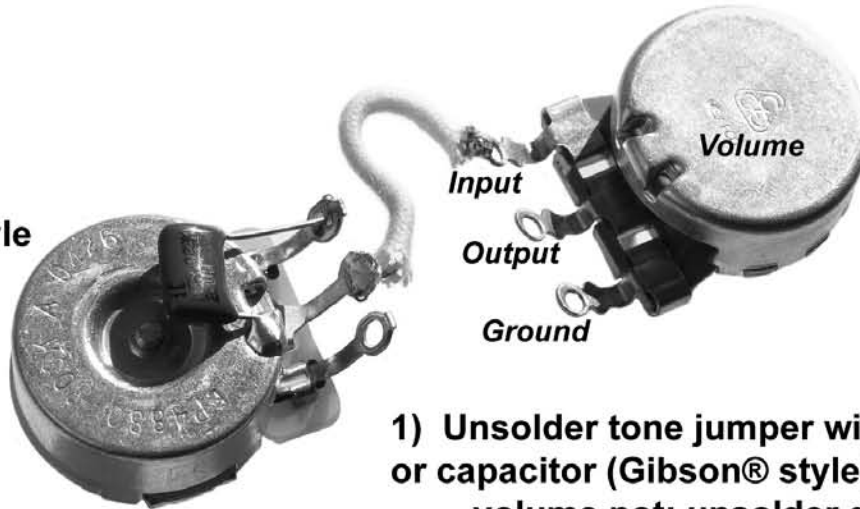

- 1) Unsolder tone jumper wire (Fender® style) or capacitor (Gibson® style) from input lug of volume pot; unsolder ground/shield wire from tone pot case.

Gibson® style  
tone pot

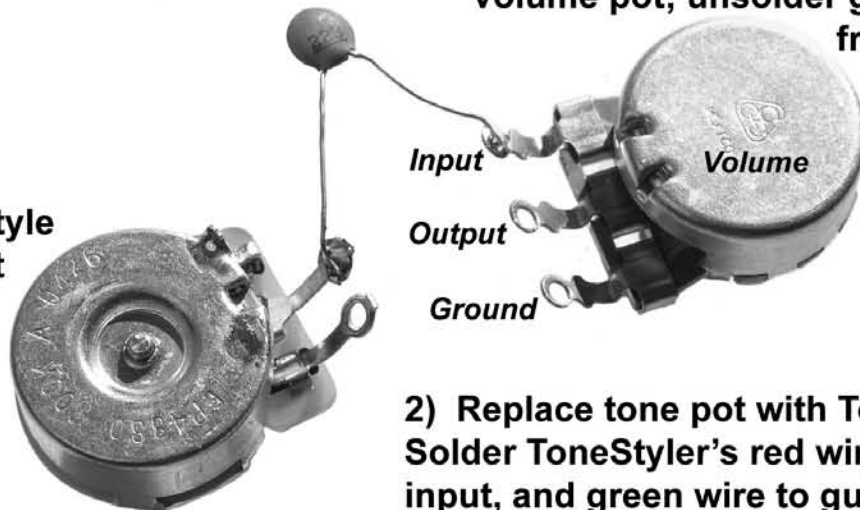

- 2) Replace tone pot with ToneStyler®. Solder ToneStyler's red wire to volume pot's input, and green wire to guitar's ground.

ToneStyler®  
tone selector

